

SB-5525 6x2 SCART MATRIX SWITCHER

SCART AUDIO MATRIX


Inputs : 6x SCART via Scart Female Connectors
Outputs : 2x SCART Via Scart Female Connectors



INTRODUCTION

SB-5525 is a 6:2 MATRIX SCART RGB/S-Video (Y/C)/ Composite Video/ Stereo Audio switching product. The switcher supports 6 individual inputs with 2 individual outputs. The matrix function of SB-5525 can route any input and output to each other. The switcher completely eliminates the need to constantly move around SCART input and output cables. It is ideally suitable for High Resolution TV applications. Control is provide via Front pressed buttons with LED readout or IR remote controller.

SB-5525 SCART MATRIX SWITCHER 6x2

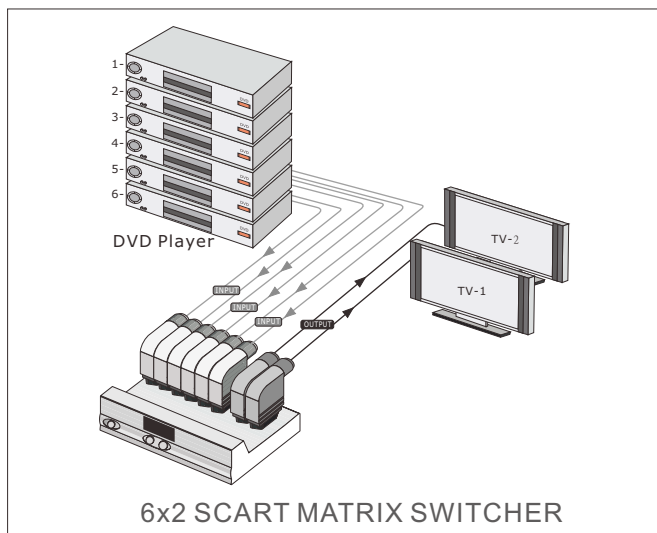

FEATURES

1. Support SCART 6 inputs To 2 Outputs Matrix Switcher
2. Inputs: 6x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 2x SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. SCART Group input/output Signals included
RGB
S-Video (Y/C)
Composite Video
Audio: Stereo Audio (AR, AL)
4. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
5. Control By IR Remote and Direct Selection by Front Panel express Buttons
6. Inputs status with LED display Read Out via front Panel
7. Support ON/OFF Power switch on Front Panel

SPECIFICATIONS

1. Type of Switcher: 6 in To 2 out SCART Matrix Switcher
2. Type of Signal : SCART (RGB, S-Video, Composite Video and Stereo Audio)
3. Video Bandwidth: 110 MHz, -3dB (G=+2)
4. High Speed and fast settling on 5V
5. IR Frequency : 38 KHz
6. Low power of 4.4 mA/Amplifier
7. Scan rates accepted: 50Hz or 60Hz
8. Auto Scan 16:9 or 4:3 monitor screen
9. Support Lower power consumed full load under 650/400mA
10. Controls: IR remote controller, front pushbuttons with LED readout
11. Safety approvals: CE, FCC, RoHS(2002/95/EC)
12. Dimensions: 9.37" x5.67" x1.68" (238mm x144mm x42.6mm)
13. Power Supply : DC12V / 1.25A